




Perfect control and
easy handling



Multiple vessel
treatment due to
tip shape retention
and durability



Smooth guide
wire trackability
and optimal
visibility




Technical data /
ordering info

Vascular Intervention // Coronary
Coronary Guide Wire

 **BIOTRONIK**
excellence for life

Cruiser

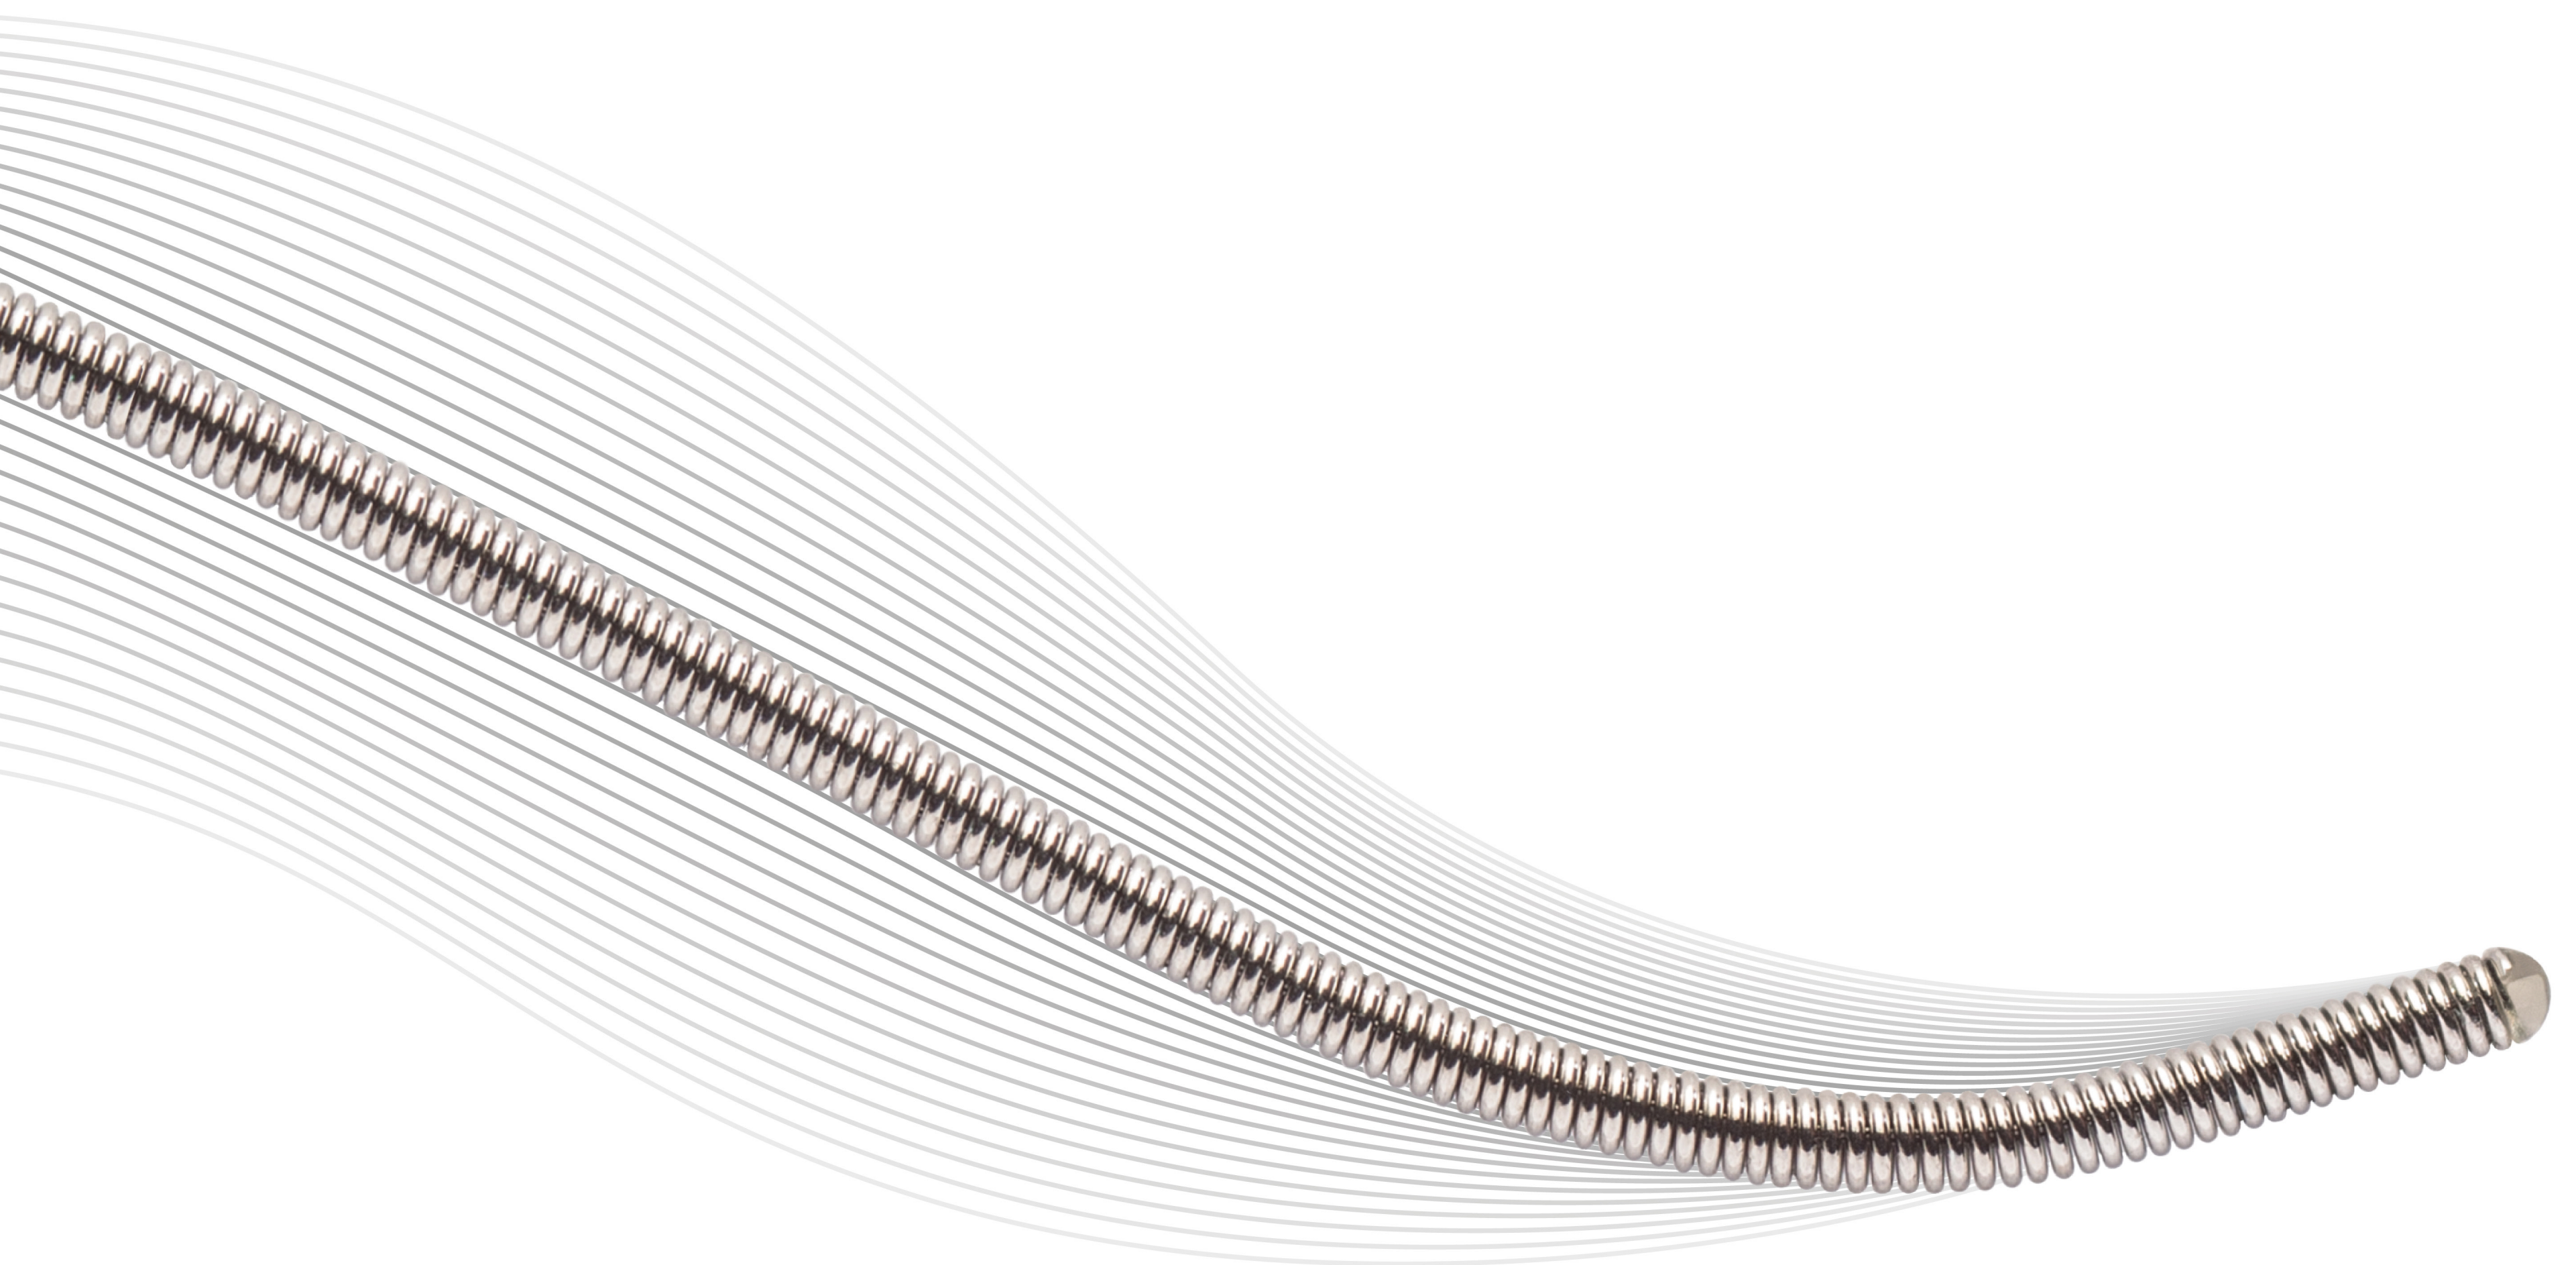



Cruiser

Indicated for coronary arteries.*

Technical Data	Guide wire
Diameter	0.014"
Length	190 cm
Core wire material proximal	Stainless steel
Core wire material distal	Chromium enriched Nitinol
Proximal coil	Stainless steel
Distal coil	Platinum, radiopaque (3 cm for standard support/4.5 cm for ES)
Shaping ribbon	Stainless steel (3 cm)
Proximal (shaft) coating	PTFE
Distal coating	Hydrophobic (30 cm)
Range of tip flexibilities	High flexible, flexible, medium
Range of support levels	Standard and Extra Support (ES)
Shaft markers	92 cm and 102 cm from distal end

Ordering Information	Catalogue number	Tip shape	Tip flexibility	Label color code	Support level	Length
	351460	Straight	High flexible	■ Red	Standard	190 cm
	351463	J	High flexible	■ Red	Standard	190 cm
	351461	Straight	Flexible	■ Orange	Standard	190 cm
	351464	J	Flexible	■ Orange	Standard	190 cm
	351462	Straight	Medium	■ Blue	Standard	190 cm
	351465	J	Medium	■ Blue	Standard	190 cm
	351466	Straight	High flexible	■ Brown	Extra support	190 cm
	351468	J	High flexible	■ Brown	Extra support	190 cm
	351467	Straight	Flexible	■ Yellow	Extra support	190 cm
	351469	J	Flexible	■ Yellow	Extra support	190 cm

*Indicated also for peripheral arteries (as per IFU).

