# Galeo Pro

Coronary Guide Wire Indicated for PTCA applications





- High tensile stainless steel core wire for excellent shape retention
- Enhanced torque response for unique steerability
- Hydrophilic coating to minimize friction
- Broad selection of tip stiffness and support levels



## Galeo Pro Navigation made easy

A new generation of the classic Galeo guidewire from BIOTRONIK. Galeo Pro features improved durability, better control and a modernized distal coating while maintaining a broad range of configurations.

# Galeo Pro Improved durability

#### Feedback

Hydrophilic coating minimizes friction along the wire and lets you focus on tactile feedback from the tip.

#### Control

One piece tapered core wire, provides an excellent torque response that gets you to the desired vessel.

#### Durability


High tensile stainless steel core wire for excellent shape retention that allows you to treat multiple lesions with one wire.

#### Choice

A broad selection of tip stiffnesses and support levels. Find your own favorite and have the option to adapt to the situation at hand.

#### Drive

The direct connection between your hand and the distal tip is facilitated by the Controlled Transmission Platform that enhances the torque response and offers unique steerability.

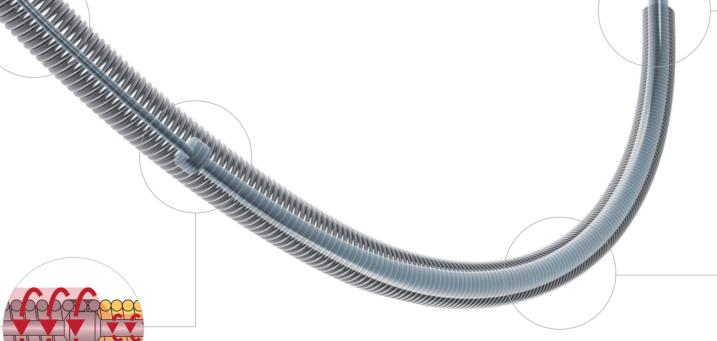

### Galeo Pro

### Coronary Guide Wire

Technical Data	Guide wire						
	Diameter	Diameter					
	Length	Length		190 cm and 300 cm			
	Core wire material	Core wire material		High tensile stainless steel			
	Proximal coil	Proximal coil Distal coil Proximal (shaft) coating Distal coating Range of tip flexibilities		21.5 cm, stainless steel			
	Distal coil			26 mm, palladium, radiopaque			
	Proximal (shaft) coat			PTFE			
	Distal coating			Hydrophilic (30 cm)			
	Range of tip flexibilit			High Flexible (HF), Flexible (F), Medium (M)			
	Range of support lev	Range of support levels		Standard and ES (Extra Support)			
	Shaft markers	Shaft markers		92 cm and 102 cm from distal end			
Order Information	Catalogue number	Tip shape	Tip flexibility	Label color code	Support level	Length	
	389781	Straight		■ Red	Standard	190 cm	
	389782	J	High Flexible				
	389783	Straight					
	307703	Straight	E1	_ 0	6: 1 1		
	389784	J	Flexible	Orange	Standard	190 cm	
		9					
	389784	J	Flexible Medium	<ul><li>Orange</li><li>Blue</li></ul>	Standard Standard	190 cm 190 cm	
	389784 389785	J Straight	Medium	■ Blue	Standard	190 cm	
	389784 389785 389786	J Straight J					

For ordering please contact your local sales representative

Manufacturer: Manufacturer.

Concert Medical, LLC 77 Accord Park Dr. Norwell, MA 02061 -1605 · USA 8180 Bülach · Switzerland Tel +1 (781) 871 7882 info@concertmedical.com www.concertmedical.com

Distributor: BIOTRONIK AG Ackerstrasse 6 Tel +41 (0) 44 8645111 Fax +41 (0) 44 8645005 info.vi@biotronik.com www.biotronik.com

